




DO NOT MEASURE DRAWING . IF IN DOUBT PLEASE ASK.

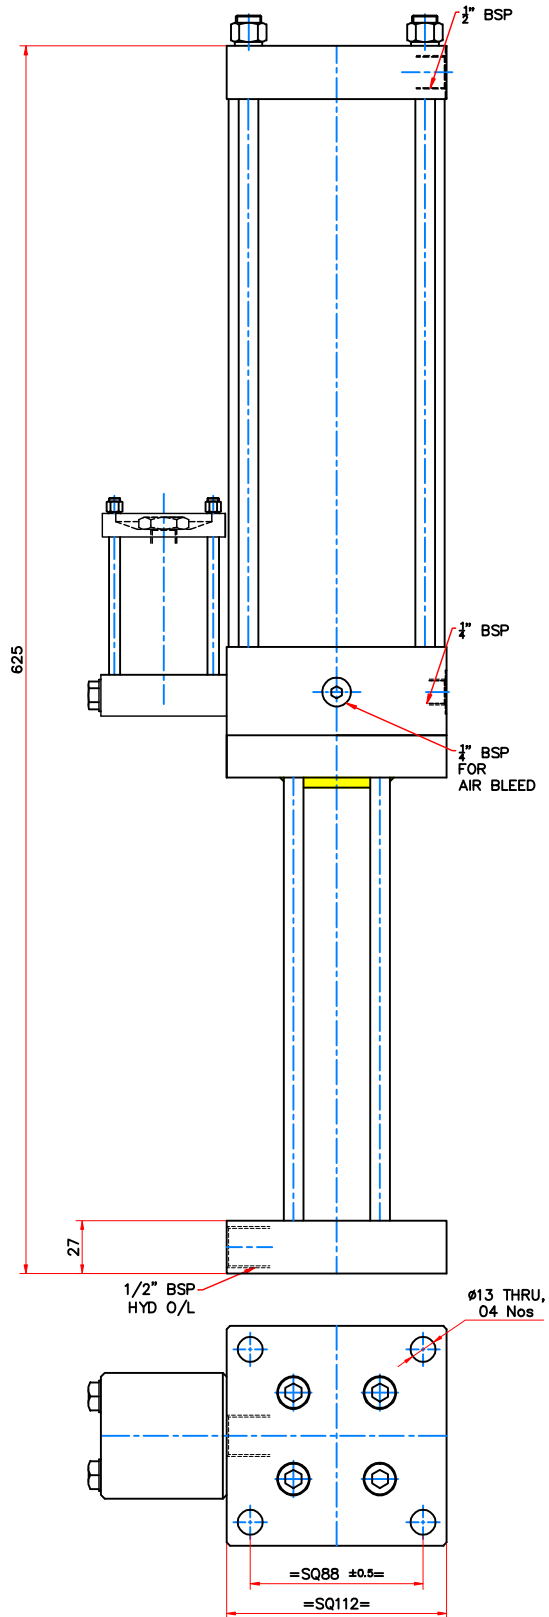

Unspecified m/c deviations (med to IS 2102)			TITLE	HYDRO-PNEUMATIC INTENSIFIER DOUBLE ACTING				
Linear-Length or Diameter			MODEL	1330-064-100			Note: Remove all sharp corners 0.5x45° All dimensions are in mm unless specified	
Over	Upto & inc.	TOL	BORE	ø100			QTY	
-	6	±0.1	ROD	ø25			SCALE	NTS
6	30	±0.2	OIL OUTPUT	100 cc				
30	120	±0.3	INT. RATIO	1:16	DRAWN	SKH	19/02/16	
120	315	±0.5	MOUNTING	FRONT FLANGE	CHKD	RBP	19/02/16	
315	1000	±0.8	RATED PR.	7 kg/cm²	APPD	RBP	19/02/16	
1000	2000	±1.2						
Length of shorter side of angle								
Over	Upto & inc.	TOL						
-	6	±1°						
6	30	±30'						
30	120	±20'						
120	315	±10'						



ORSETT  
HYDRAULICS

ORSETT HYDRAULICS PVT. LTD.  
AHMEDABAD INDIA



ORSETT HYDRAULICS PVT. LTD.  
AHMEDABAD INDIA